



4.1

EHD SERIES


DIRECTIONAL VALVE WITH SOLENOID

EHD:


Nominal size	08
Rated pressure(bar)	315
Rated flow(L/min)	30/60

Benefits:

- High efficiency
- Less volume, lighter weight
- Low pressure drop,
less fuel consumption
- Fine controlling



EHD08 (No hydraulic lock)

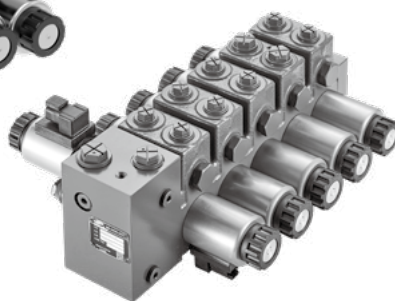

EHD08 (With hydraulic lock)

Contents

	Page
Features	03
Section view	04
Technical data	05
Ordering code	06-07
Hydraulic diagram	08
Inlet section assembly	
· Inlet section assembly	09
· Inlet section assembly-with electrical proportional throttle valve	10
Middle section assembly	
· Middle section assembly	11
· Middle section assembly-with hydraulic lock	12
Endlet section assembly	13
Unit dimensions	14

Features

1. System:

Open center, for fixed displacement pump

Closed center, for load-sensing variable displacement pump

· Electrical switch and electrical proportional control

2. Structure

· Sandwich plate of design

3. Pressure

· Primary and secondary pressure relief valve

· LS pressure relief valve

4. Applications



Corn combine
harvester



Wheat combine




Ensilage harvester



Telescopic handler


Section view

· With hydraulic lock

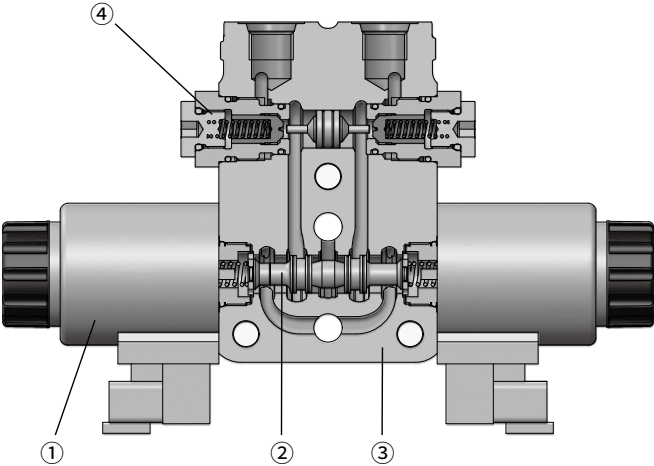

1. Solenoid
2. Main spool
3. Valve block
4. Hydraulic lock

· No hydraulic lock

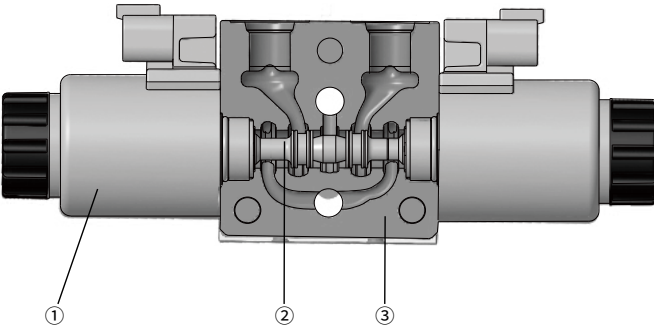

1. Solenoid
2. Main spool
3. Valve block

Technical data

General

Structure	Stackable design		
Nominal size	08		
Type of connection	ISO 1179 / ISO6149		
Mass (kg)	Inlet element		4.2/6.3
	Middle section	General	2.8
		With hydraulic operated check valve	3.2
	End element		0.6/0.8

Hydraulic

Max. flow	Q (L/min)	30/60
Max. working pressure at port	P (bar)	315
	A/B (bar)	315

Electric

Electrical on/off or electrical proportional:


- Connection: Deutsch DT04-2P
- Protection class: IP69k
- Supply voltage: 12 or 24VDC





Using environment

Hydraulic fluid	Mineral oil (HL, HLP) according to DIN 51524. Other hydraulic fluids, such as HEES (Synthetic Ester) according to VDMA 24568.
Hydraulic fluid temperature range(°C)	-20 ~ +80
Viscosity range ν (mm ² /s)	10 ~ 380
Maximum permissible degree of contamination of the pressure fluid cleanliness class to ISO 4406 (C)	Class 20/18/15, we therefore recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$

(For applications outside above mentioned parameters, please consult our sales dept.)

Ordering code

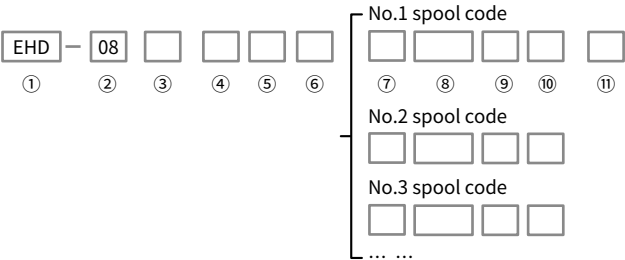

Basic code	① Structure	EHD	Stackable design
	② Nominal size		08
	③ Number of blocks	..	01~10
Inlet element	④ Main relief valve	Q	Without main pressure relief valve
		P...	With main pressure relief valve, (pressure in bar, 3-digits)
	⑤ LS relief valve	Q	Without LS pressure relief valve (LS relief valve plug)
		S...	With LS pressure relief valve (pressure in bar, 3-digits)
	⑥ Additional features	LZ	Electric proportional throttling
		LA	Electromagnetic unloading
		N	None
Middle section	⑦ Spool symbol	E1	 =E1
		E2	 =E2
		E3	 =E3
		Q1	 =Q1

Ordering code

EHD

—

08

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩



⑪

No.1 spool code



No.2 spool code

No.3 spool code

... ..


Middle section	⑦ Spool symbol	Q2	
		Q3	
	⑧ A/B flow	..—..	Flow in l/min, 2-digits, e.g. 50-50
	⑨ Operator type	W41	Electrical switch control, 24V
		W43	Electrical switch control, 12V
	⑩ AB hydraulic operated check valve	OO	Without hydraulic operated check valve
		AB	The AB port has a hydraulic operated check valve (Maximum flow rate: 30L/min)
		AO	Only A port has a hydraulic operated check valve (Maximum flow rate: 30L/min)
		OB	Only B port has a hydraulic operated check valve (Maximum flow rate: 30L/min)
	⑪ Design code	001	
*	Other request	Further requirement in the clear text	

Hydraulic diagram

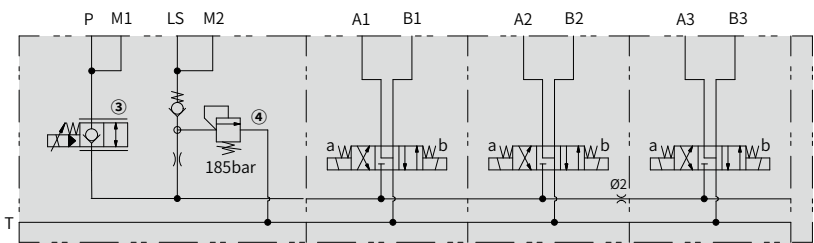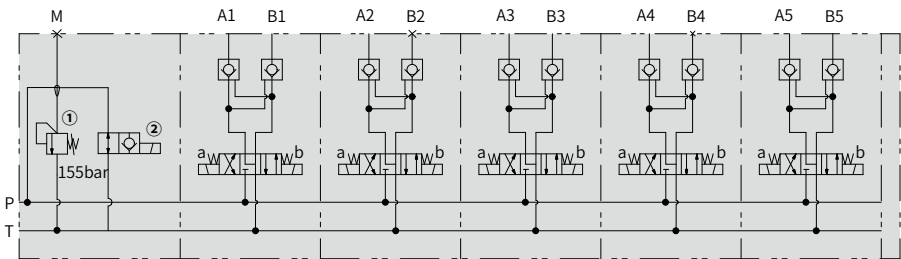


- ① Main relief valve
- ② Electromagnetic unload valve
- ③ Electrical proportional throttle valve
- ④ LS relief valve

Inlet section assembly


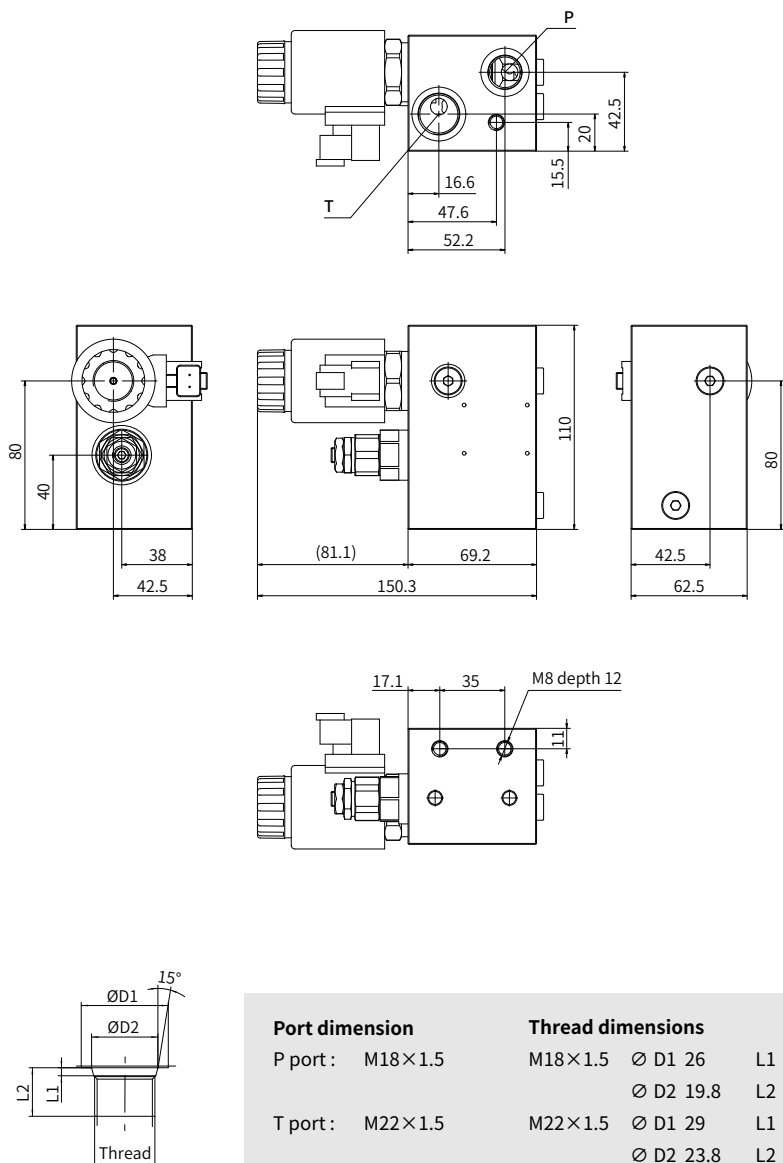


Inlet section assembly- with electrical proportional throttle valve

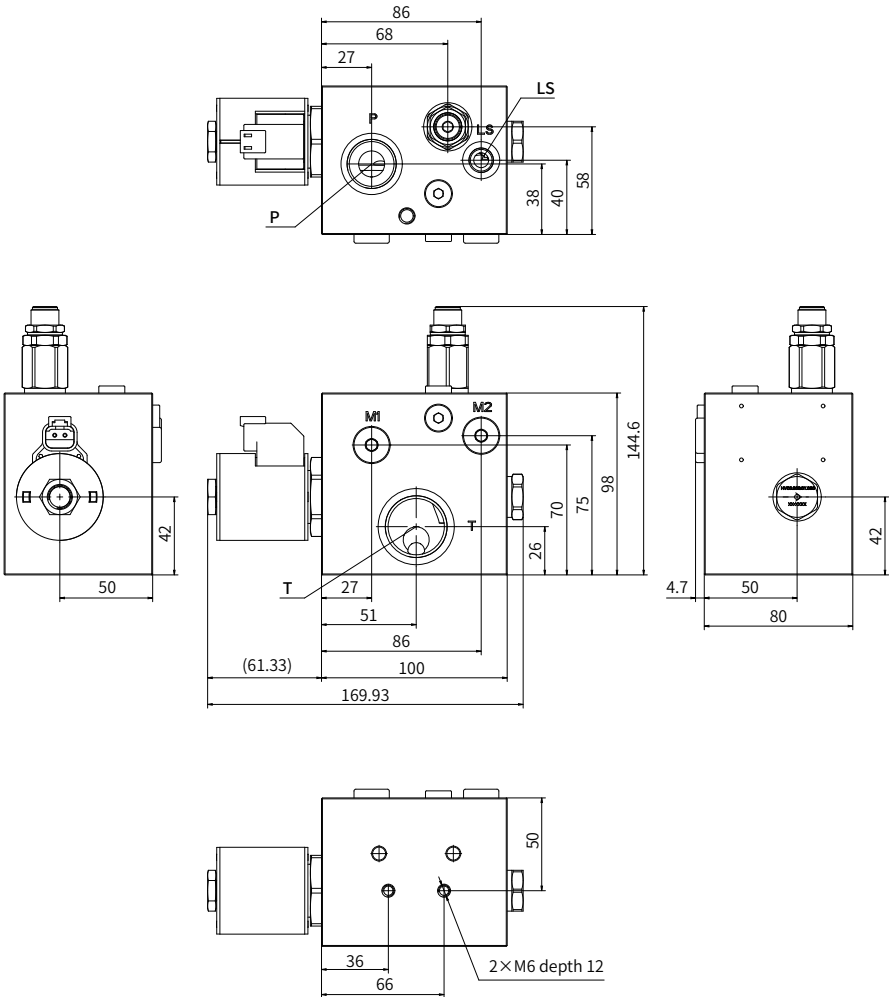

Port dimension	Thread dimensions
P port : G3/4	G3/4: Ø D 33 L 16.5
T port : G1	G1: Ø D 41 L 19
LS port : G1/4	G1/4: Ø D 20 L 12.5
M port : G1/4	

Middle section assembly

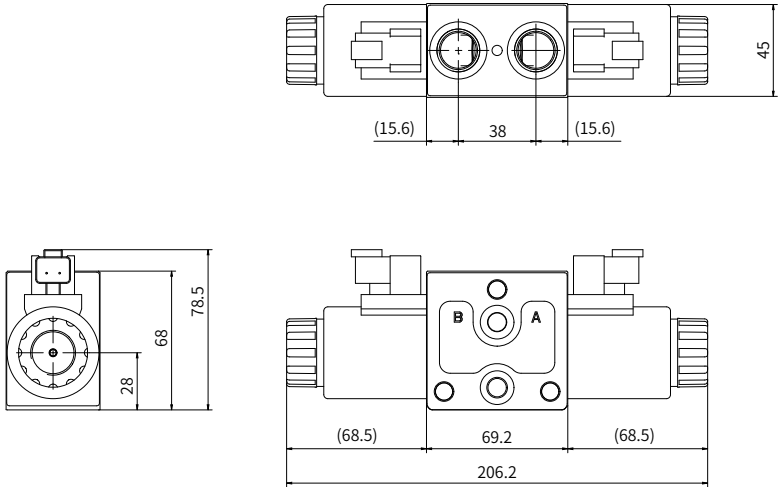



Port dimension

A/B port : G3/8
or G1/2

Thread dimensions

G3/8: Ø D 23 L 12.5
G1/2: Ø D 28 L 15

Middle section assembly-with hydraulic lock

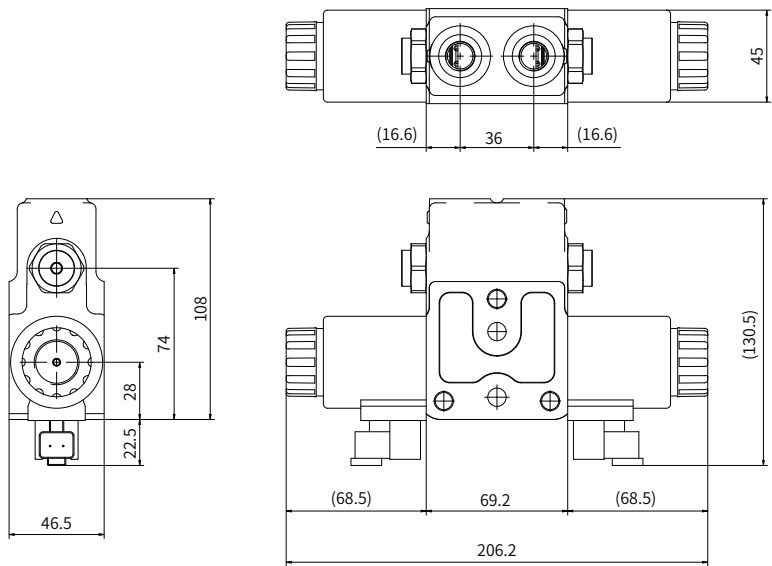


Port dimension

A/B port: M18×1.5
or M14×1.5


Thread dimensions

M18×1.5	$\varnothing D1$ 26	L1 2.4
	$\varnothing D2$ 19.8	L2 14.5
M14×1.5	$\varnothing D1$ 21	L1 2.4
	$\varnothing D2$ 15.8	L2 11.5

Endlet section assembly

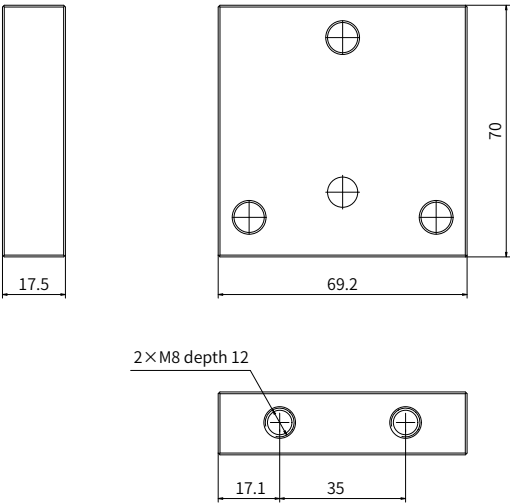

Unit dimensions

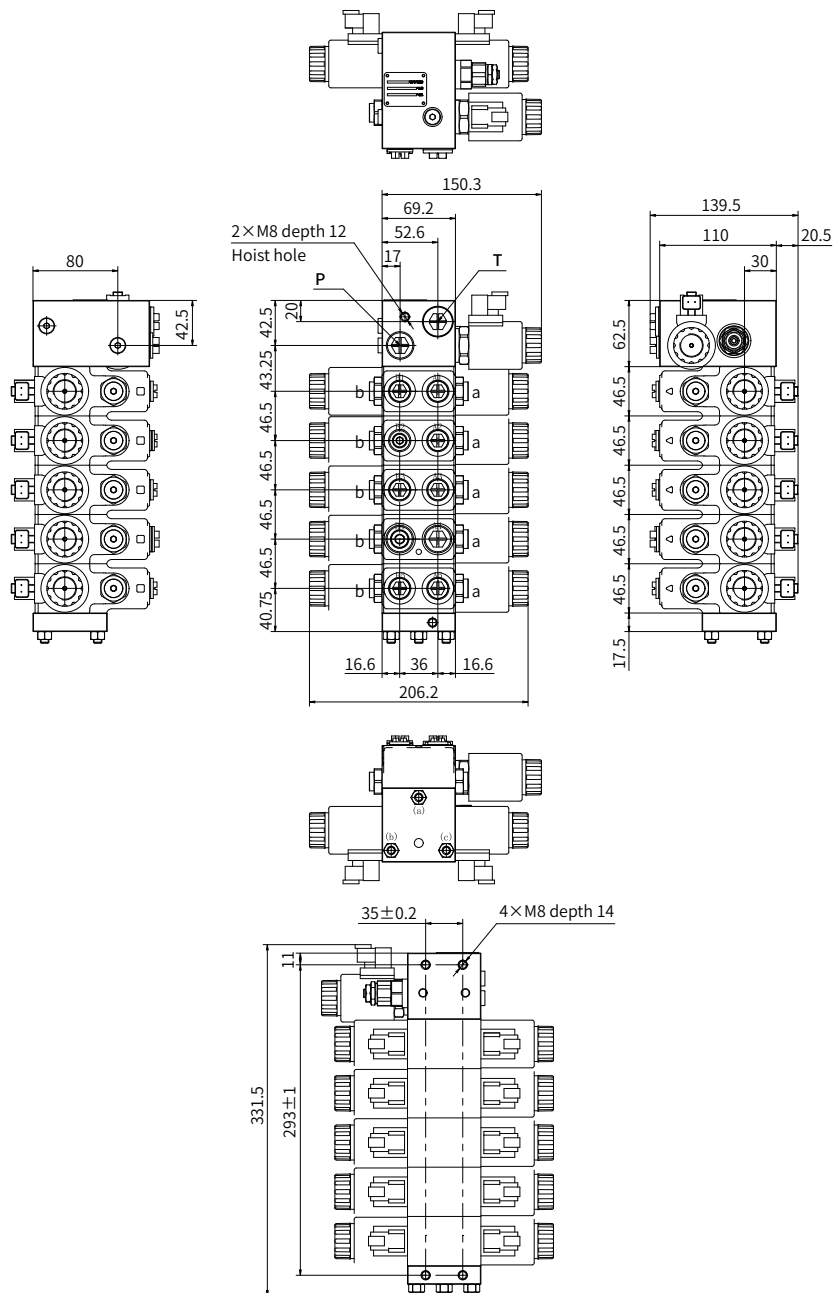



© This brochure can be reproduced, edited, reproduced or transmitted electronically without the authorization of Hengli Hydraulic Company. Due to the continuous development of the product, the information in this brochure is not specific to the specific conditions or applicability of the industry, thus, Hengli does not take any responsibility for any incomplete or inaccurate description.